


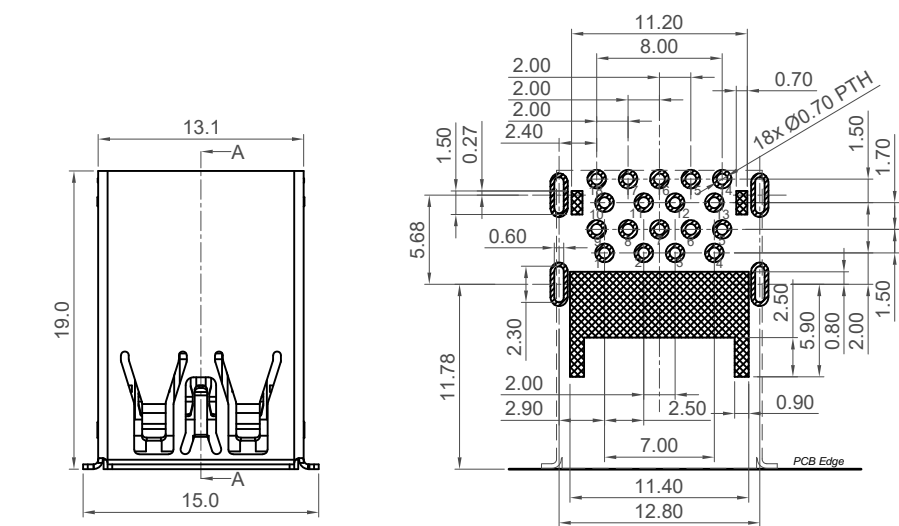



H
G
F
E
D
C
B
A

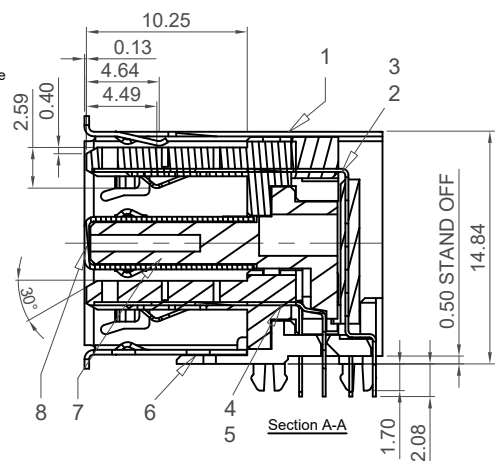

No.	Part Name	Material	Finish	Q'ty
1	Cover	SUS201	Ni Plating	1
2	Top Housing	PA9T		1
3	Top Pin	C5210 EH	Au Plating	1
4	Bottom Housing	PA9T		1
5	Bottom Pin	C5210 EH	Au Plating	1
6	Base	PA9T		1
7	Spacer	PA9T		1
8	Mid-Plate	SUS201	Degrease	

PIN LAYOUT			
PIN No.	SIGNAL NAME	DESCRIPTION	MATING SEQUENCE
1	VBUS	Power	Second
2	D-	USB2.0 Differential pair	Third
3	D+		
4	GND	Ground for power return	Second
5	StdA_SSRX-	Superspeed receiver differential pair	Last
6	StdA_SSRX+		
7	GND_DRAIN	Ground for signal return	
8	StdA_SSTX-	Superspeed transmitter differential pair	
9	StdA_SSTX+		
SHELL	SHIELD	Connector metal shell	First

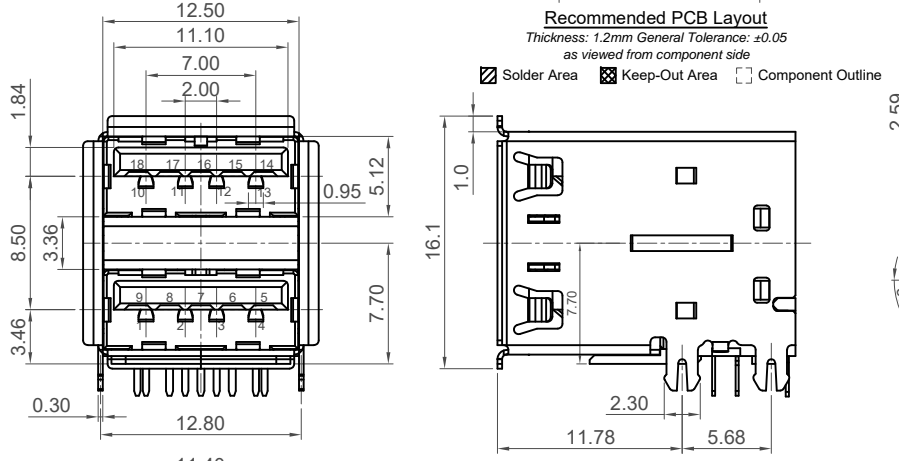

Ordering Grid
USB1100-30-A Request Samples and Quotation
 Contact Plating
 30 = 30µ" Gold
 Packing Options
 A = Tape & Reel
 (200 per reel)

Designed to comply with physical, electrical and environmental requirements of full size USB Standard Compliance (USB3.0).

Specifications

Material
 Plastic Housing: PA9T, UL94V-0, Blue
 Terminal: Copper Alloy
 Metallic Shell: SUS201 (T=0.30mm)

Plating (See table above for more info)
 Terminal:
 Contact Area: Gold (See ordering grid)
 Solder Tails: 80µ" min. Tin
 Underplating : 50µ" min. Nickel
 Metallic Shell : 50µ" min. Nickel

Electrical
 Voltage Rating: 100 V AC
 Current Rating:
 0.25A (Signal Pins 2,3,5,6,7,8,9)
 1.8A (Power Pins 1,4)
 Operating Temperature: -55°C to +85°C
 Contact Resistance: 30 mΩ max.
 Insulating Resistance: 1000 MΩ min.
 Dielectric Withstand Voltage: 500V AC/minute

Mechanical & Environmental
 Mating Force: 35N max.
 Unmating Force: 10N min. initial, 8N min. after test
 Durability: 5000 Cycles

Part Number		Product Description	
USB1100		USB 3.0 Dual Receptacle, Full Size, Type A, Top Mount, Horizontal, Through-Hole	
Drawing Date		20th February 2013	
By	CC	Tolerances (Except as Noted)	Units:
Detail	USB1100 C PCN	X. ± 0.50 XX ± 0.38 X.XX ± 0.20 X.XXX ± 0.10	Metric (mm)
Revision	C1	± 2°	
Date	24/08/21		







This drawing is confidential and copyright of Global Connector Technology, Ltd (GCT). This drawing must not be copied or disclosed without written consent. E & OE



Not to Scale	Drawn By AJO	Sheet No. 1/2
--------------	--------------	---------------

1 2 3 4 5 6 7 8

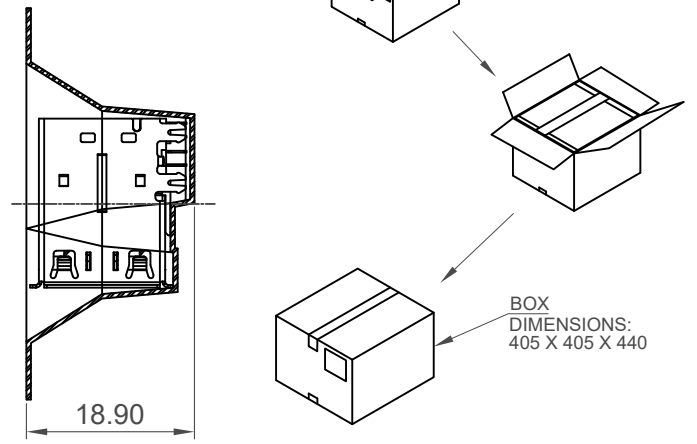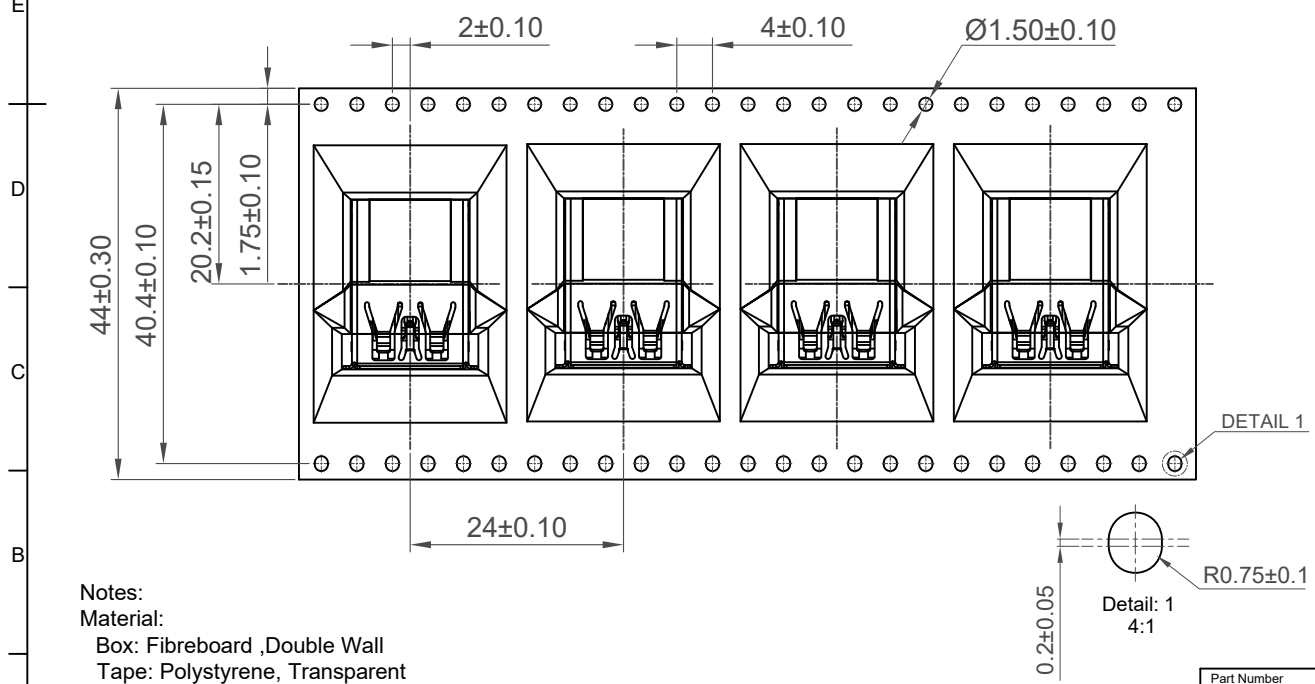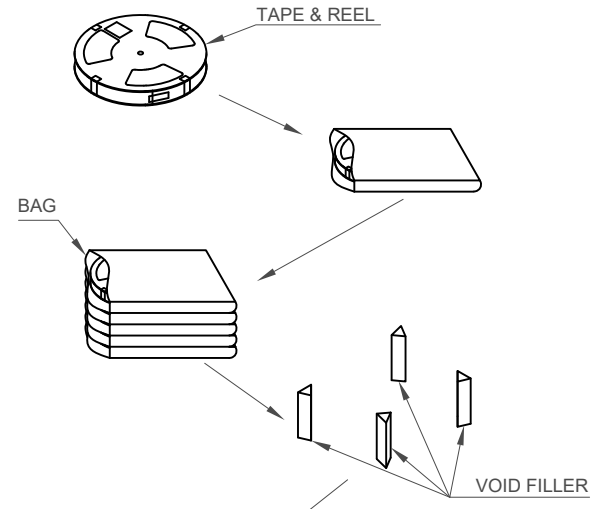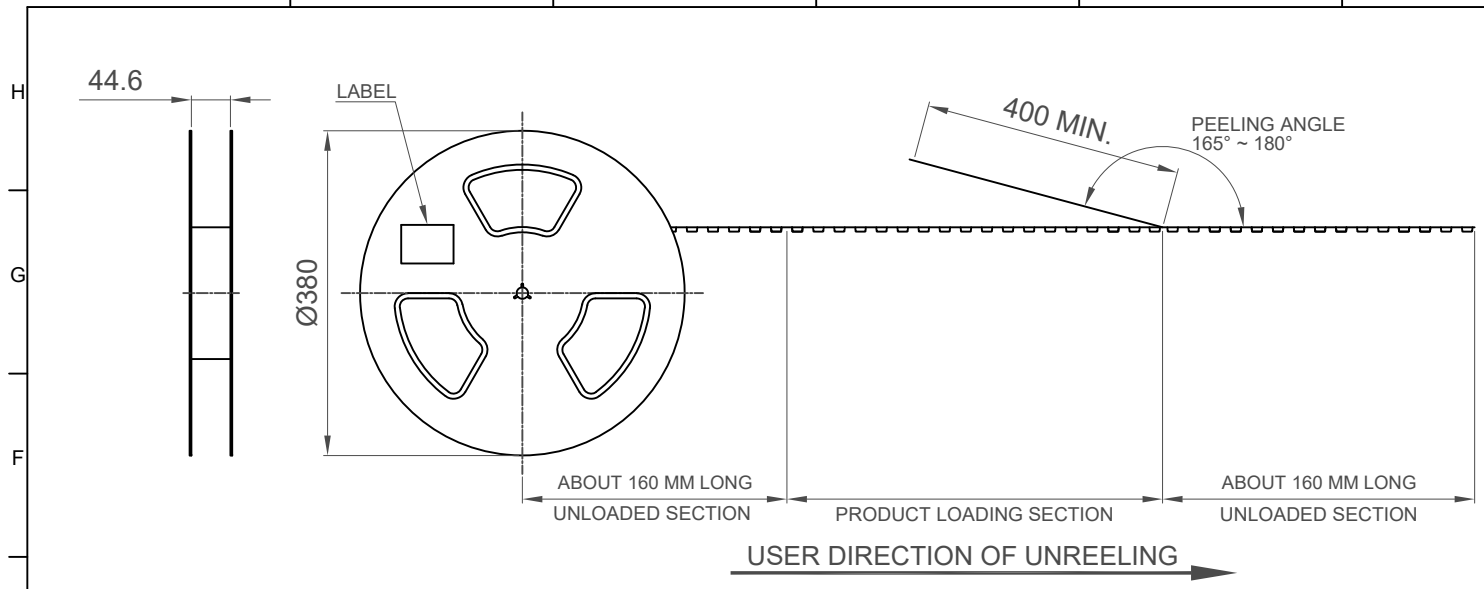

Notes:
 Material:
 Box: Fibreboard ,Double Wall
 Tape: Polystyrene, Transparent
 Heat Resistant Temperature: 120°C
 Reel: Polystyrene, Blue
 Heat Resistant Temperature: 70°C
 Bag: Polyethylene ,Heat Resistant Temperature: 100°C

Packing Spec
 1. Peeling strength: 0.1N~1.3N (10~130grams)
 2. Peeling Speed: 300 mm/min
 3. Each bag will include desiccant.

Products P/N	PCS/Reel	Reels/Carton	PCS/Carton
USB1100	200	8	1600

Part Number		Product Description	
USB1100		USB 3.0 Dual Receptacle, Full Size, Type A, Top Mount, Horizontal, Through-Hole	
Drawing Date		20th February 2013	
By	CC	Tolerances (Except as Noted)	Units:
Detail	USB1100 C PCN	Length	Metric (mm)
Revision	C1	Angle	3rd Angle Projection
Date	24/08/21		



This drawing is confidential and copyright of Global Connector Technology, Ltd (GCT). This drawing must not be copied or disclosed without written consent. E & OE



Not to Scale	Drawn By AJO	Sheet No. 2/2
--------------	--------------	---------------