


15984.2

WE-CON-R



Webeasy I/O connection module, Connecting interface from power supply and BUS cable to screw terminals, Mounting type: Mounting rail TS 35, Supply voltage range: 20 V - 28 VAC/DC

Business data

Packaging unit	1
Quantity unit	PC
Weight per piece (not including packaging)	86 g
Weight per piece (including packaging)	125 g
Unit of weight	G
Customs number	85423190
Country of origin	NL
Product description	Controller module

Technical data

Connection data


Connection principle	Screw connection
Wire cross-section single core (rigid), min.	0.2 mm ²
Wire cross-section single-core (rigid), max.	4 mm ²
Wire cross-section stranded, min.	0.2 mm ²
Wire cross-section stranded, max.	4 mm ²
Wire cross-section stranded with wire-end ferrules, min.	0.2 mm ²
Wire cross-section stranded with wire-end ferrules, max.	2.5 mm ²
Stripping length	6 mm
Torque	0.4 Nm

Environmental Product Compliance

REACH Conform	Yes, yes
REACH Reference date	2021-07-08
REACH Candidate Substance Note	No
RoHS Conform	Yes, yes

Media

PE	PE	A1	A1	A2	A2		
24V AC/DC							
WE-CON (-R)					INTERNAL BUS	A1	—
					A2	—	
					A	—	
					B	—	
BUS IN			BUS OUT				
A	B	A2	A2	B'	A'		

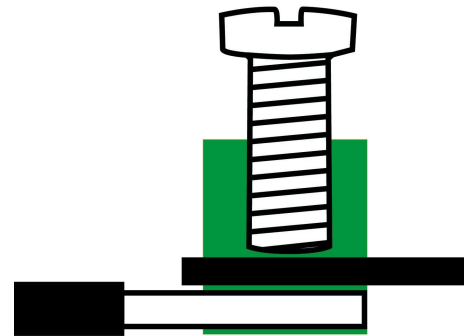

Accessories
