



Compact reporting system for mobile networks to monitor analogue and digital values, and to remotely switch relay outputs, Mounting type: Mounting rail TS 35, Supply voltage range: 10 - 30 VDC.

**RAL:** 9018

### Business data

Packaging unit	1
Quantity unit	PC
Weight per piece (not including packaging)	97 g
Weight per piece (including packaging)	135 g
Unit of weight	G
Customs number	85176990
Country of origin	NL
Product description	Controller module

### Technical data

#### Dimensions

Length	95 mm
Width	36 mm
Height	65 mm

#### Connection data

Connection principle	Screw connection
Number of outputs	1
Wire cross-section single core (rigid), min.	0.2 mm <sup>2</sup>
Wire cross-section single-core (rigid), max.	2.5 mm <sup>2</sup>
Wire cross-section stranded, min.	0.2 mm <sup>2</sup>
Wire cross-section stranded, max.	2.5 mm <sup>2</sup>
Stripping length	6 mm
Torque	0.4 Nm
Switching voltage / switching voltage max.	250 / 250 VAC
Continuous current max. / Inrush current max.	5 / 5 A
Switching capacity, max.	1200 VA
Switching frequency, max.	6/min kHz
Electrical lifespan (AC1)	1,5x10 <sup>7</sup>
Mechanical lifespan	15x10 <sup>7</sup>
Relay contact	1CO

#### Ratings

Number of channels	2
Input signal U/I, max.	30 V / -
Input resistance U/I	80K / 500 Ohm
Resolution U (0 ... 10 Vdc)	20mV / ±(20mV+0,3%)
Resolution I (0 ... 20 mA)	40 µA / ± (40 µ + 0,3%)
Pulse length, min.	500 ms
Threshold digital inputs	Low <2, High >4V
Counter input (pull-down)	1000 pulses/s, max. pull-down res. 24 kOhm

---

### Technical data

---

#### Materials

---

Contact material	AgNi 90/10
Working temperature, min.	-20 °C
Working temperature, max.	50 °C
Relative humidity, max.	80 (non-condensing) %

#### GSM data

---

SIM card	Nano SIM
2G	Quad-band GSM bands: 850, 900, 1800 and 1900 MHz
3G	Five-band UMTS (WCDMA/FDD) bands: 800, 850, 900, 1800, 1900 and 2100 MHz
Antenna GSM	50 ohm, SMA plug

#### Further technical data

---

Power supply	10-30 VDC -
Current consumption	275 @ 24 VDC mA
Protection class	IP20
Storage temperature, min.	-20 °C
Storage temperature, max.	70 °C
Mounting	Mounting rail TS35 / direct mount
Backup power	Internal maintenance-free supercap capacitor
Electromagnetic properties	Directive 2014/30/EC in compliance with EN 55011 and EN 61326-1
Frequency spectrum	RED 2014/53/EC in compliance with ETSI EN 301-511 V9.0.2 Hz
Number of expansion modules, max.	15

#### BUS data

---

Bus protocol / interface	Modbus RTU / RS485, half-duplex, non-insulated
--------------------------	--

#### Print

---

Colour	Light grey
--------	------------

---

---

### Technical data

---

#### Environmental Product Compliance

---

REACH Conform	yes
REACH Reference date	2021-07-08
REACH Candidate Substance Note	No
RoHS Conform	yes

---

### Approvals

---

### Standards and regulations

---


Standards / specifications	Low-Voltage Directive (LVD) 2014/35/EC, in compliance with EN 50178. EMC Directive 2014/30/EC, in compliance with EN 61326-1
----------------------------	--

---

---

### Media

---

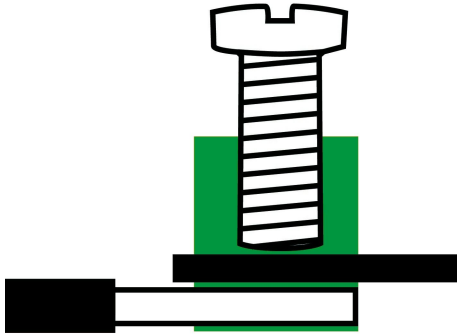

---

### Accessories

---

### GSM-PRO I/O-Modules

#### Controller module

#### General order data

Product number:	Article name	GTIN (EAN)	Packaging unit
16375.2	GSM-PRO-10DI	4044211207755	500 ST



GSM-PRO I/O analogue output module, 4 analogue outputs 0 - 10V, Mounting type: Mounting rail TS 35, Supply voltage range: 20 V - 28 VDC

#### General order data

Product number:	Article name	GTIN (EAN)	Packaging unit
16376.2	GSM-PRO-4AO	4044211207762	500 ST



GSM-PRO I/O digital output module, 4 relay outputs 1 W, 250 V, 16 A (inrush 80 A), With LED display, Mounting type: Mounting rail TS 35, Supply voltage range: 20 - 28 VDC

#### General order data

Product number:	Article name	GTIN (EAN)	Packaging unit
16378.2	GSM-PRO-4DO	4044211207786	500 ST



16368.2

GSM-PRO2

---

## GSM-PRO I/O-Modules

---



GSM-PRO I/O analogue input module, 8 analogue inputs 0 - 10 V, 0 (4) - 0 mA, NTC, RTD (PT1000 / NI1000), Mounting type: Mounting rail TS 35, Supply voltage range: 20 - 28 VDC

---

### General order data

Product number:	Article name	GTIN (EAN)	Packaging unit
16377.2	GSM-PRO-8AI	4044211207779	500 ST

---

### Antennas



GSM UMTS antenna with omni-directional characteristic, SMA round plug, Connecting cable length: 3 m

#### General order data

Product number:	Article name	GTIN (EAN)	Packaging unit
16061.2	GSM-ANTENNA-EXTERNAL-SMA-3M	4044211145972	500 ST



GSM UMTS antenna with omni-directional characteristic, SMA round plug, Connecting cable length: 5 m

#### General order data

Product number:	Article name	GTIN (EAN)	Packaging unit
16172.2	GSM-ANTENNA-EXTERNAL-SMA-5m	4044211187002	500 ST



GSM omni-directional antenna, 90° with SMA round connector

#### General order data

Product number:	Article name	GTIN (EAN)	Packaging unit
16379.2	GSM-ANTENNA-90°	4044211207793	500 ST

Creation date 17.11.2021 12:40:32  
Subject to technical changes

## 16368.2 GSM-PRO2

---

### Antennas

---



GSM UMTS antenna with omni-directional characteristic, SMA round plug, Connecting cable length: 10 m

---

#### General order data

Product number:	Article name	GTIN (EAN)	Packaging unit
16173.2	GSM-ANTENNA-EXTERNAL-SMA-10M	4044211187019	500 ST

---

---

### Connection cables

---



USB 2.0 connection cable [1 USB 2.0 plug A - 1 USB 2.0 plug Micro-B] Cable length: 1.5 m, gold-plated plug contacts, colour: black

---

#### General order data

Product number:	Article name	GTIN (EAN)	Packaging unit
16382.2	GSM-USB-MICRO-cable	4044211207823	500 ST

---